




SPECIFICATIONS

FREQUENCY RANGE	3-32 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 1.0 dB
PHASE IMBALANCE	± 14°
ISOLATION	> 18 dB
MAXIMUM VSWR	1.8
INSERTION LOSS	< 3.5 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	
4030320	2.4 mm Female
4030320K	2.9mm Female
WEIGHT (ounces)	2.7
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS IN INCHES

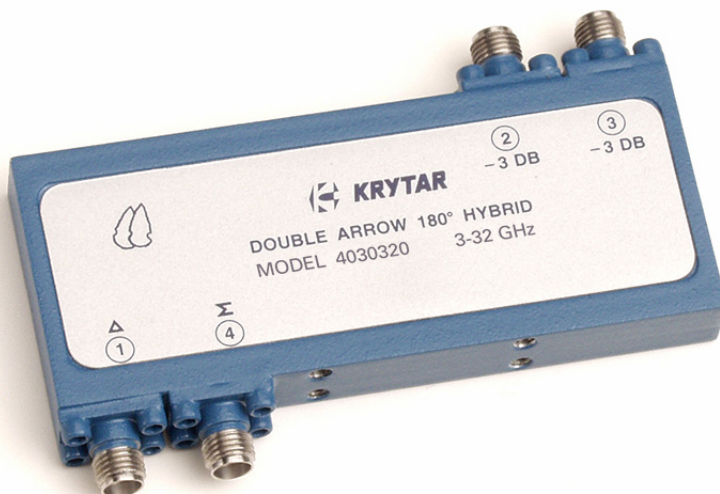