




MODELS 4030360/ 4030360K DOUBLE ARROW 3-36 GHZ 180° HYBRID COUPLER

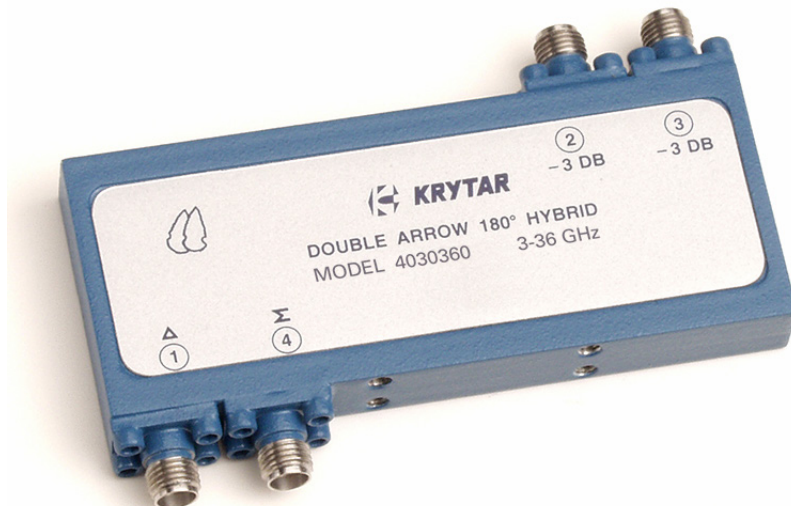

SPECIFICATIONS

FREQUENCY RANGE	3-36 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 1.2 dB
PHASE IMBALANCE	$\pm 18^\circ$
ISOLATION	> 18 dB
MAXIMUM VSWR	1.8
INSERTION LOSS	< 4.0 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	
4030360	2.4mm Female
4030360K	2.9mm Female
WEIGHT (ounces)	2.7
OPERATING TEMPERATURE	-54° to $+85^\circ$ C

DIMENSIONS IN INCHES

