




SPECIFICATIONS

FREQUENCY RANGE	1-40 GHz
COUPLING (with respect to output)	
Nominal	16 ± 1.0 dB
Frequency Sensitivity	± 1.2 dB
DIRECTIVITY	> 10 dB
MAXIMUM VSWR (any port)	1.5, 1-20 GHz 1.7, 20-40 GHz
INSERTION LOSS (includes coupled power)	1.5dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	2.4 mm Female
WEIGHT (ounces)	1.3
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS IN INCHES

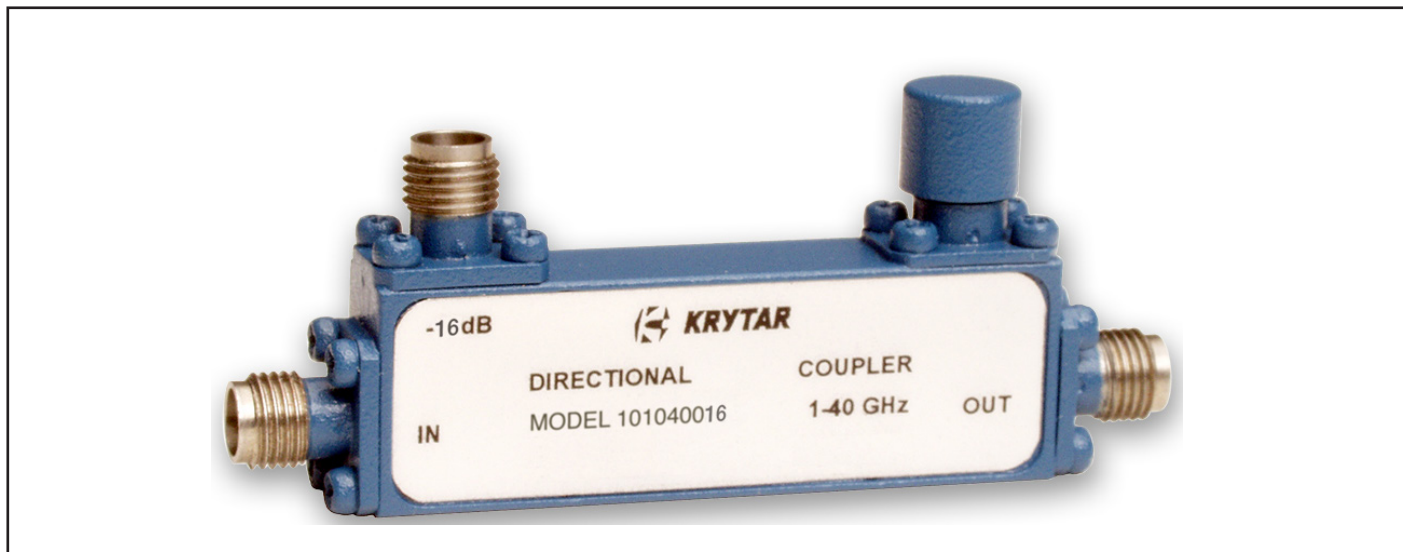