




SPECIFICATIONS

FREQUENCY RANGE	7.0-24.0 GHz
COUPLING (with respect to output)	
Nominal	106026506
Frequency Sensitivity	10 ± 0.5 dB
	± 0.3 dB
DIRECTIVITY	> 13 dB
MAXIMUM VSWR	1.4
INSERTION LOSS (includes coupled power)	< 1.2 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	3.5mm Female
Optional:	3.5mm Male
WEIGHT (ounces)	1.1
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS (INCHES)

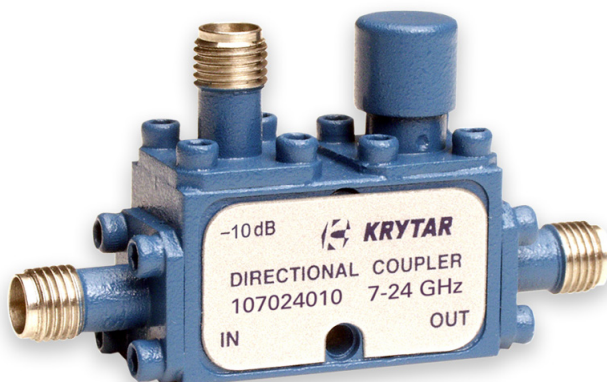