




SPECIFICATIONS

FREQUENCY RANGE	2-20 GHz
COUPLING (with respect to output)	
Nominal	30 ± 1.0 dB
Frequency Sensitivity	± 0.5 dB
DIRECTIVITY	> 12 dB
MAXIMUM VSWR (any port)	1.5
INSERTION LOSS (includes coupled power)	< 0.9 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
Optional:	SMA Male N Female
WEIGHT (ounces)	1.7
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS

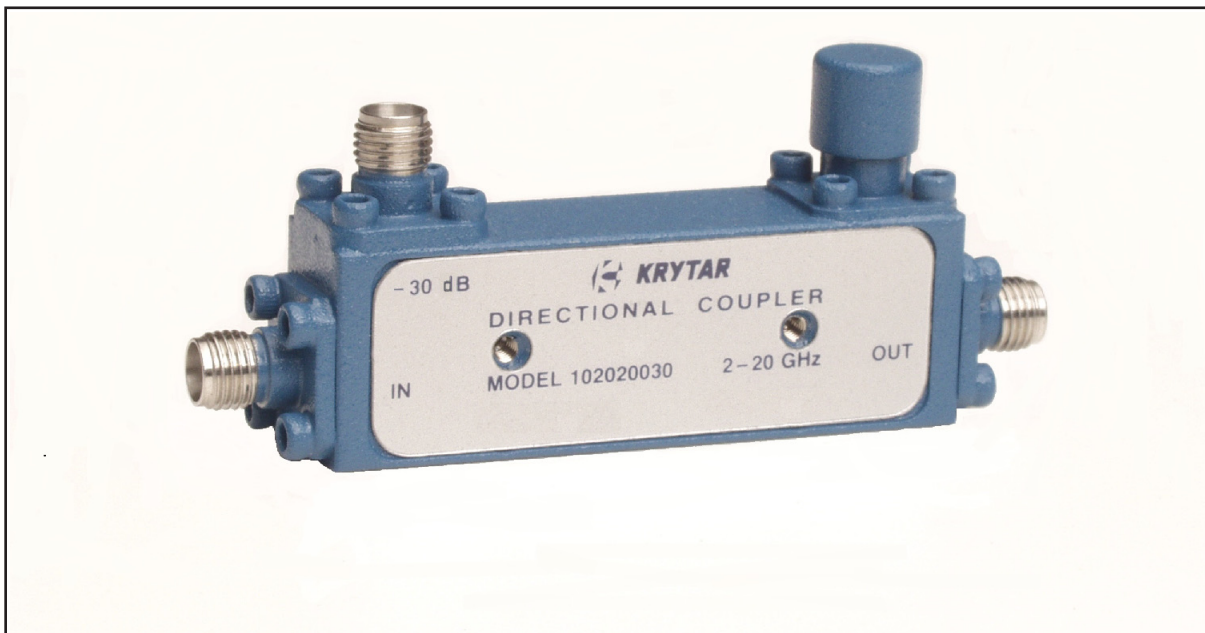