



KRYTAR®


MODEL 1825 2-18 GHz DIRECTIONAL COUPLER



SPECIFICATIONS

FREQUENCY RANGE	2-18 GHz
COUPLING (with respect to output)	
Nominal	30 ± 1.0 dB
Frequency Sensitivity	± 0.5 dB
DIRECTIVITY	> 12 dB
MAXIMUM VSWR (any port)	1.5
INSERTION LOSS (includes coupled power)	< 0.9 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	1.7
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS

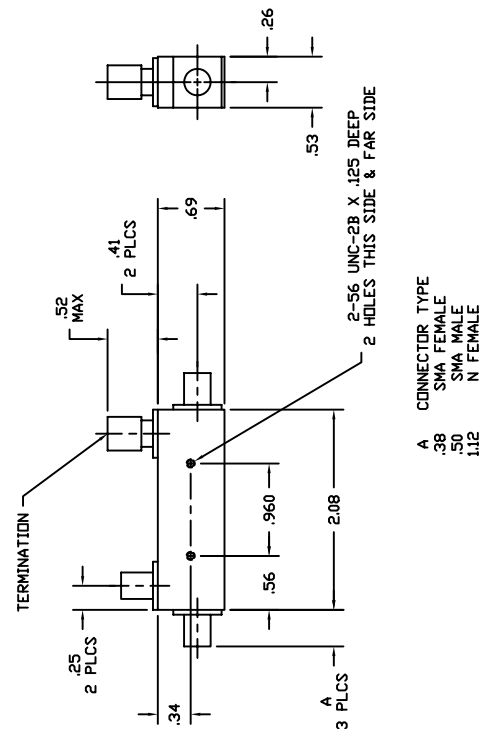

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com