MODEL 262213

18-26.5 GHz DIRECTIONAL COUPLER

SPECIFICATIONS

FREQUENCY RANGE	18-26.5 GHz
COUPLING (with respect to output)	
Nominal	13 ± 1.0 dB
Frequency Sensitivity	± 1.0 dB
DIRECTIVITY	> 13 dB
MAXIMUM VSWR (any port)	1.4
INSERTION LOSS (includes coupled power)	< 1.2 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	3.5mm Female
Optional: 3.5mm Male	
WEIGHT (ounces)	1.1
OPERATING TEMPERATURE	-54º to +85º C

DIMENSIONS

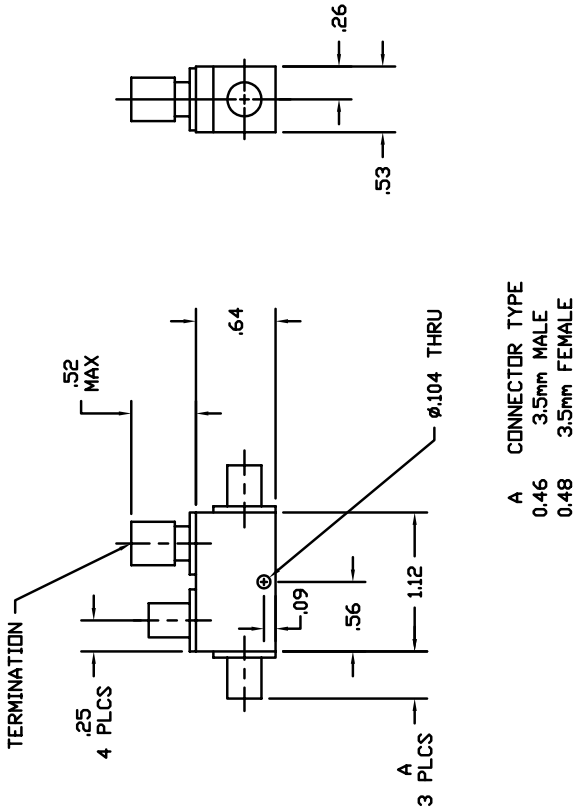

KRYTAR
1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com