




# KRYTAR®

## MODELS 265006, 265010 & 265020


### 26.5-50 GHz DIRECTIONAL COUPLER

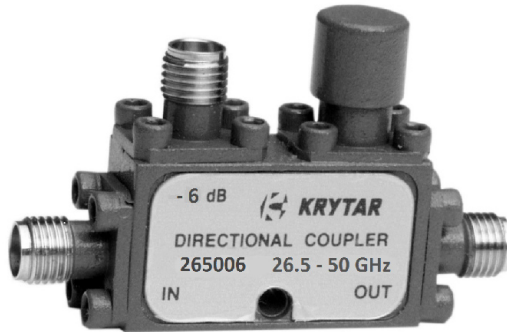

### SPECIFICATIONS

<b>FREQUENCY RANGE</b>	26.5-50 GHz
<b>COUPLING</b> (with respect to output)	
Nominal 265006	6 ± 1.0 dB
Nominal 265010	10 ± 0.7 dB
Nominal 265020	20 ± 1.0 dB
Frequency Sensitivity	± 0.50 dB
<b>DIRECTIVITY</b>	> 10 dB
<b>MAXIMUM VSWR</b> (any port)	1.8
<b>INSERTION LOSS</b> (includes coupled power)	
265006	< 2.4 dB
265010	< 1.9 dB
265020	< 1.5 dB
<b>POWER RATING</b> (input)	
Average	20 W
Peak	3 KW
<b>STANDARD CONNECTORS</b>	2.4 mm Female
<b>WEIGHT</b> (ounces)	1.0
<b>OPERATING TEMPERATURE</b>	-54° to +85° C

### DIMENSIONS

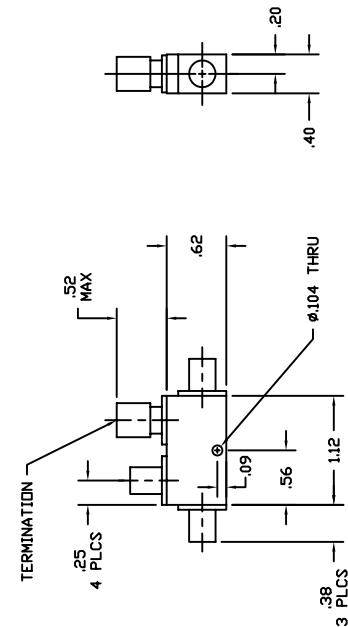

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017  
 Toll Free 1 (877) 734-5999 • www.krytar.com