




KRYTAR®

MODELS 265006, 265010 & 265020


26.5-50 GHz DIRECTIONAL COUPLER

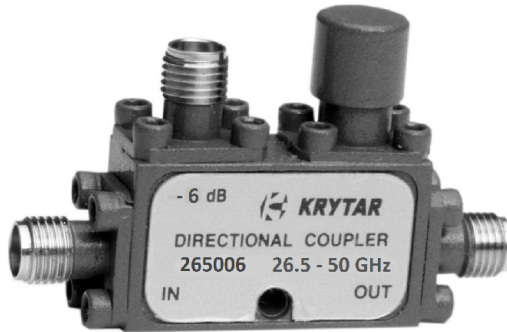

SPECIFICATIONS

FREQUENCY RANGE	26.5-50 GHz
COUPLING (with respect to output)	
Nominal 265006	6 ± 1.0 dB
Nominal 265010	10 ± 0.7 dB
Nominal 265020	20 ± 1.0 dB
Frequency Sensitivity	± 0.50 dB
DIRECTIVITY	> 10 dB
MAXIMUM VSWR (any port)	1.8
INSERTION LOSS (includes coupled power)	
265006	< 2.4 dB
265010	< 1.9 dB
265020	< 1.5 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	2.4 mm Female
WEIGHT (ounces)	1.0
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS

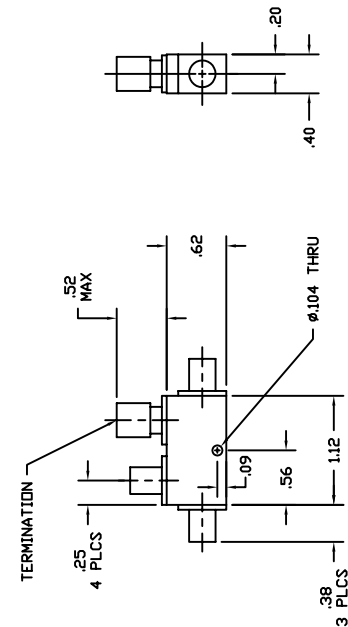

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
 Toll Free 1 (877) 734-5999 • www.krytar.com