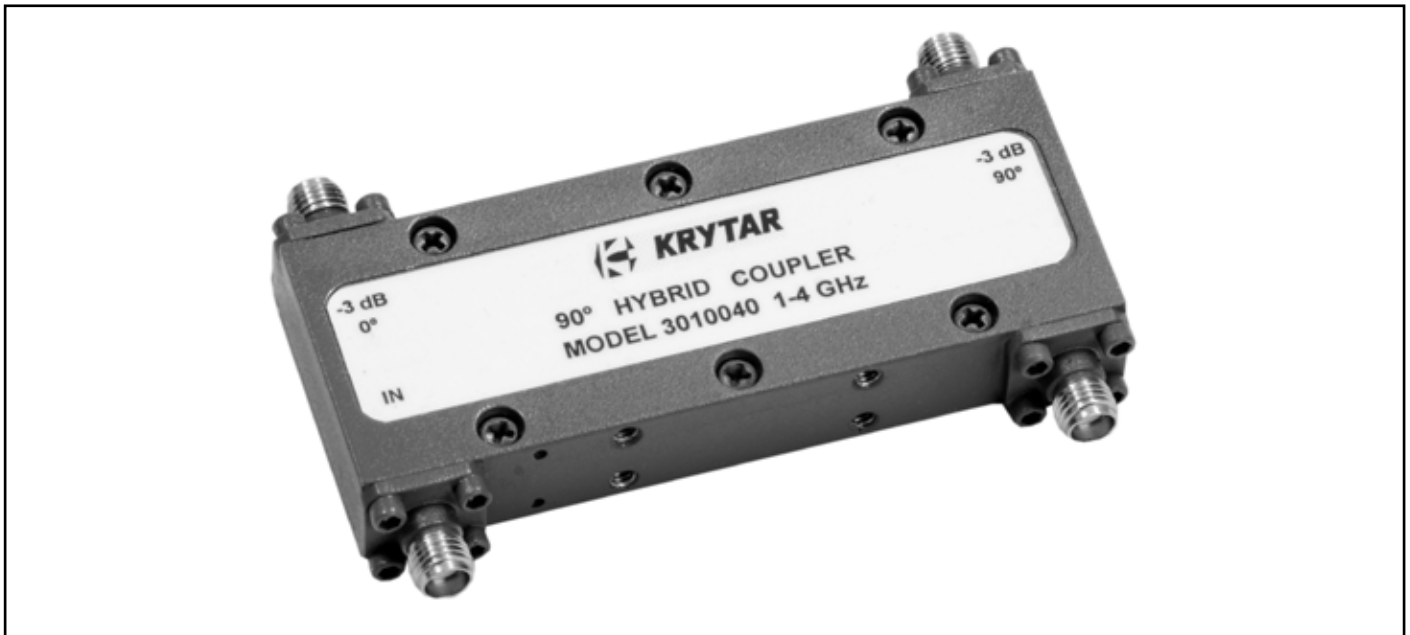


1-4 GHz 90° HYBRID COUPLER

SPECIFICATIONS

FREQUENCY RANGE	1-4 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.6 dB
PHASE IMBALANCE	± 6 Degrees
ISOLATION	> 17 dB
MAXIMUM VSWR	1.30
INSERTION LOSS	< 1.0 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	3.3
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS
