




SPECIFICATIONS

FREQUENCY RANGE	1.7-36.0 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 1.7 dB
PHASE IMBALANCE	± 12 Degrees
ISOLATION	> 12 dB
MAXIMUM VSWR	1.85
INSERTION LOSS	< 4.35 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	2.92 Female
WEIGHT (ounces)	1.6
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS

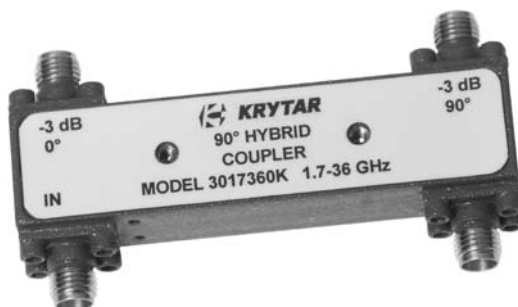