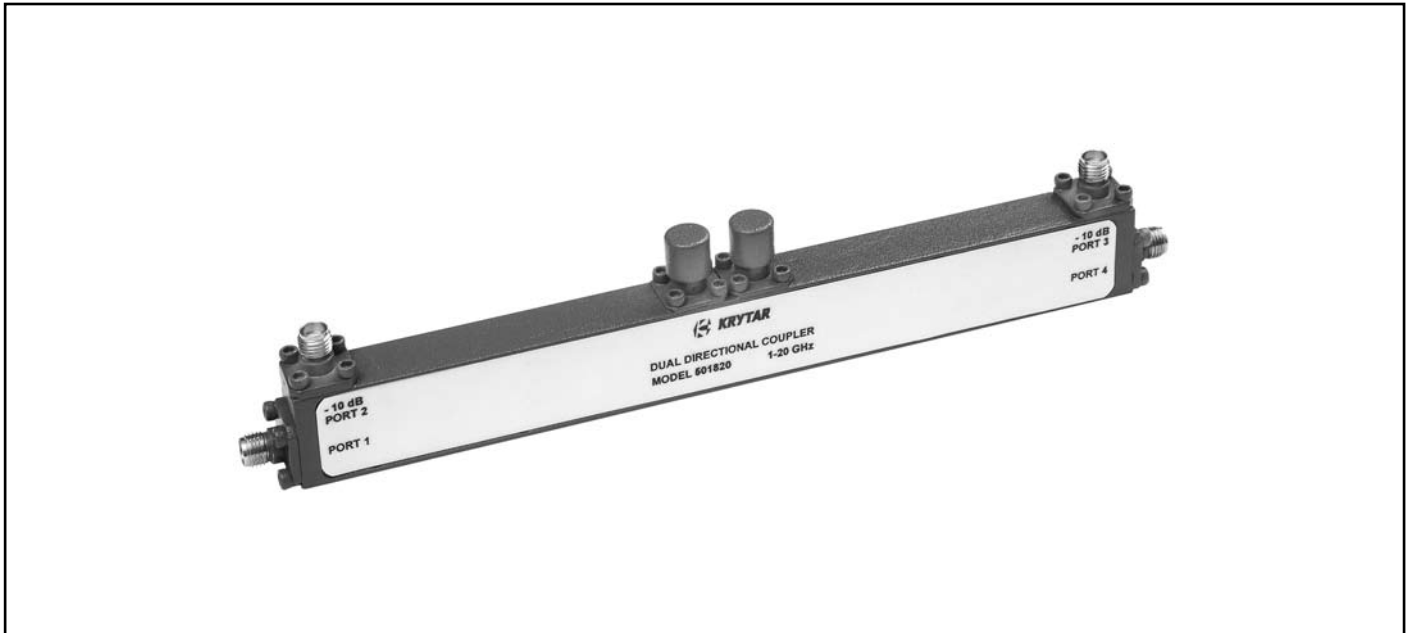


**1-20 GHz DUAL-DIRECTIONAL COUPLER**

**SPECIFICATIONS**

<b>FREQUENCY RANGE</b>	1-20 GHz
<b>COUPLING</b>	
Nominal	10 ±1.0 dB
Frequency Sensitivity	± 0.5 dB
<b>DIRECTIVITY</b>	> 15 dB
<b>MAXIMUM VSWR (any port)</b>	1.4
<b>INSERTION LOSS</b> (includes coupled power)	< 2.8 dB
<b>POWER RATING (input)</b>	
Average	20 W
Peak	3 KW
<b>STANDARD CONNECTORS</b>	SMA Female
<b>WEIGHT (ounces)</b>	4.6
<b>OPERATING TEMPERATURE</b>	-54° to +85° C

**DIMENSIONS**
