




# KRYTAR®

## BROADBAND THRESHOLD DETECTORS 100 MHz-18 GHz

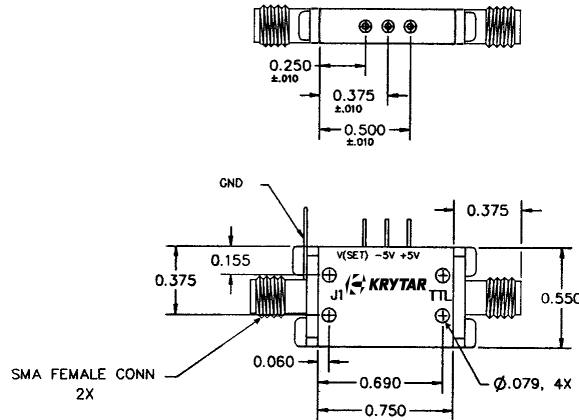

Dimensions in Inches

### SPECIFICATIONS

MODEL	FREQUENCY RANGE (GHz)	VSWR TYPICAL	THRESHOLD VARIATION (±dB Max.)
KTH0120	0.1 - 2.0	2.00	0.75
KTH0140	0.1 - 4.0	2.60	0.75
KTH0112	0.1 - 12.4	2.70	1.00
KTH0518	0.5 - 18.5	3.50	1.00
KTH2018	2.0 - 18.0	3.00	1.00
KTH6018	6.0 - 18.0	3.00	0.75
KTH8018	8.0 - 18.0	3.00	0.75

### FEATURES

High Reliability Hermetically Sealed Modules

Dynamic Range: -20 to -10 dBm

Propagation Delay: 20-50 nsec Typical, 3 dB above Threshold Setting (50% RF Input to 50% Logic at -10 dBm)

TTL: Logic Output

Minimum Pulse Width: 50 nsec Typical

Temperature Stability: 1.0 dB Typical, 3 dB above Threshold Setting

Threshold Setting: Internal Fixed or External Voltage

DC Power (No Load): ±5 VDC @ 100mA Max

Maximum Input Power: 100mW CW

Operating Temperature Range: -55 to 90°C

Storage Temperature Range: -65 to 125°C

Specification @ 25°C



1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017  
Toll Free 1 (877) 734-5999 • www.krytar.com