




MODEL 101050016


1-50 GHz DIRECTIONAL COUPLER

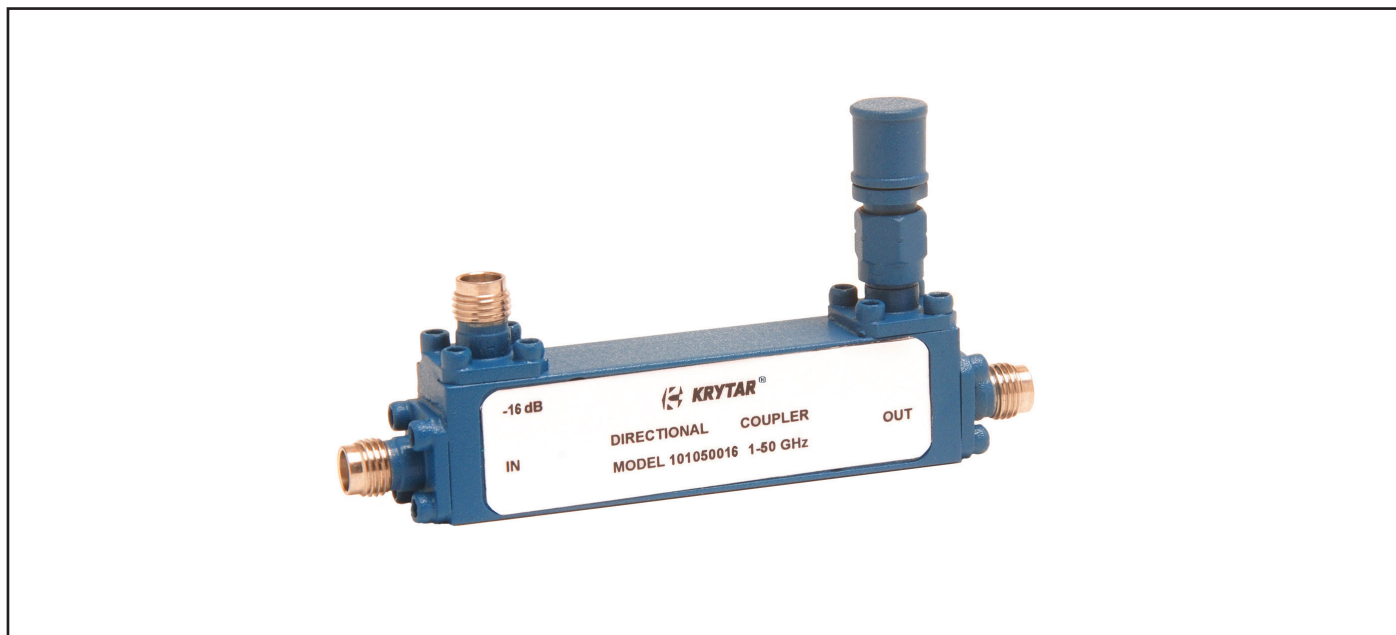

SPECIFICATIONS

FREQUENCY RANGE	1-50 GHz
COUPLING (with respect to output)	
Nominal	16 ± 1.5 dB
Frequency Sensitivity	± 1.5 dB
DIRECTIVITY	> 10.0 dB
MAXIMUM VSWR (any port)	1.5
INSERTION LOSS (includes coupled power)	2.5
POWER RATING (input)	
Average	20W
Peak	3 KW
STANDARD CONNECTORS	2.4 mm Female
WEIGHT (ounces)	2.0
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS (INCHES)

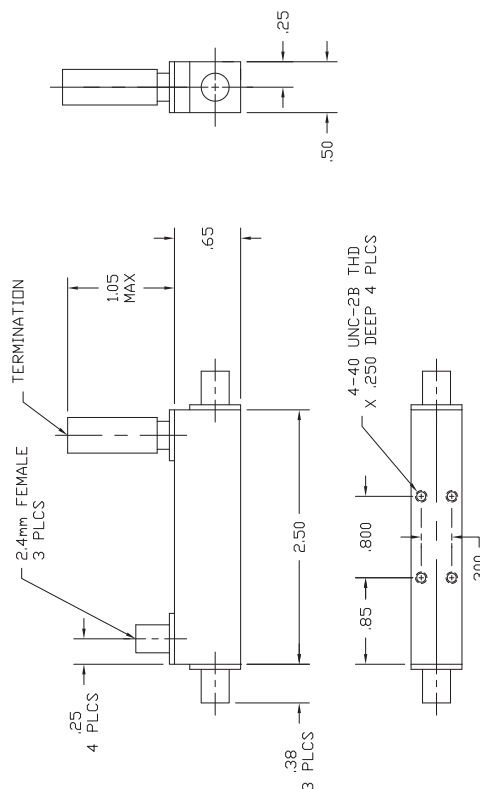

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com