





# MODELS 101050030 1-50 GHz DIRECTIONAL COUPLER

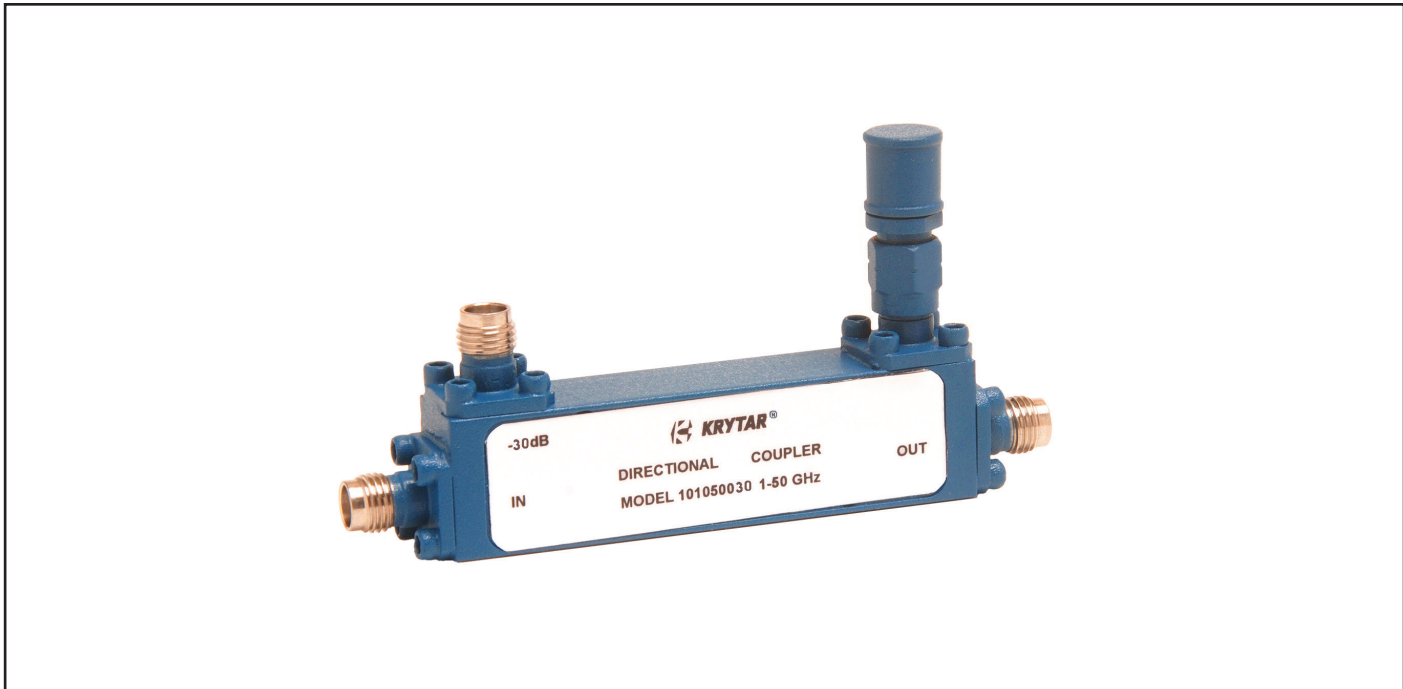

## SPECIFICATIONS

<b>FREQUENCY RANGE</b>	1-50 GHz
<b>COUPLING</b> (with respect to output)	
Nominal	30 ± 2.2 dB
Frequency Sensitivity	± 2.2 dB
<b>DIRECTIVITY</b>	> 10 dB
<b>MAXIMUM VSWR</b> (any port)	1.7
<b>INSERTION LOSS</b> (includes coupled power)	2
<b>POWER RATING</b> (input)	
Average	20W
Peak	3 KW
<b>STANDARD CONNECTORS</b>	2.4 mm Female
<b>WEIGHT</b> (ounces)	2.0
<b>OPERATING TEMPERATURE</b>	-54° to +85° C

## DIMENSIONS (INCHES)

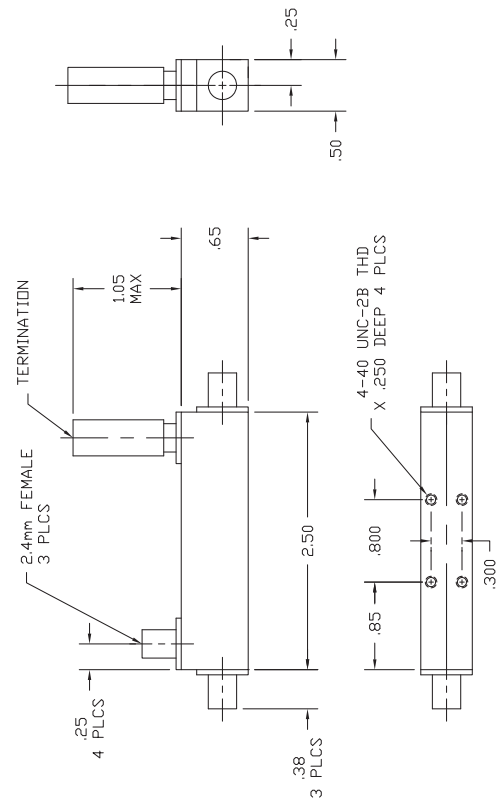

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017  
Toll Free 1 (877) 734-5999 • www.krytar.com