





MODEL 101065016
1-65 GHz DIRECTIONAL COUPLER

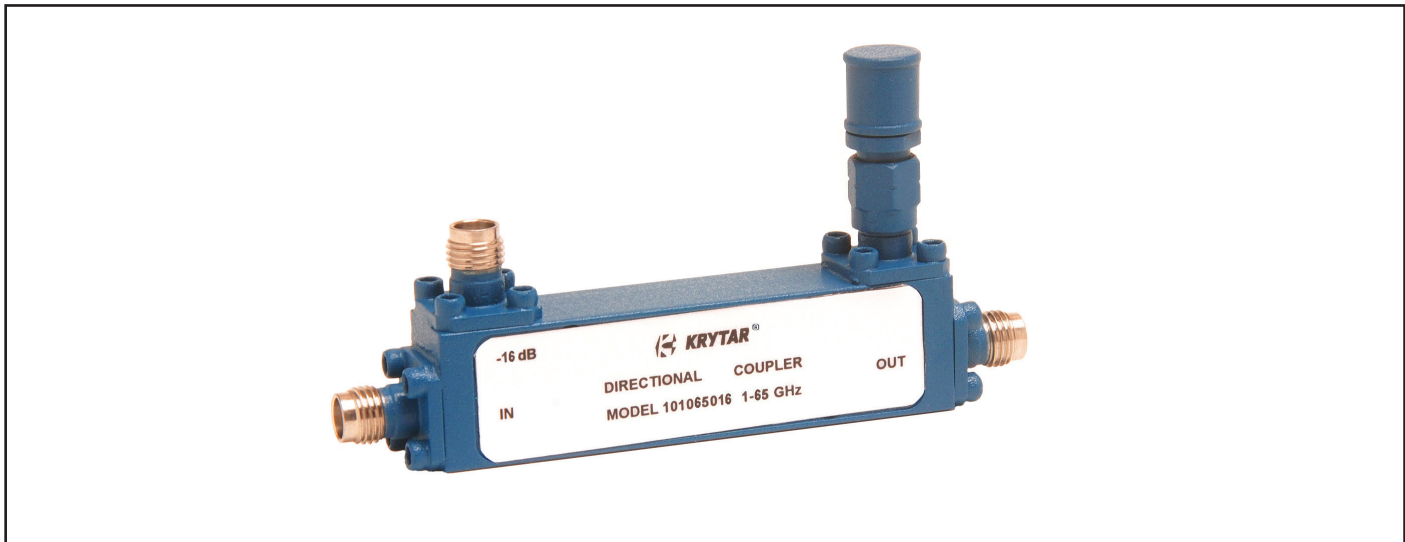

SPECIFICATIONS

FREQUENCY RANGE	1-65 GHz
COUPLING (with respect to output)	
Nominal	16 ±2.0 dB
Frequency Sensitivity	± 1.2 dB, 1-32 GHz ± 1.5 dB, 32-65 GHz
DIRECTIVITY	> 10 dB
MAXIMUM VSWR (any port)	1.6
INSERTION LOSS	< 2.8 dB
(includes coupled power)	
POWER RATING (input)	
Average	20W
Peak	3 KW
STANDARD CONNECTORS	1.85 mm Female
WEIGHT (ounces)	1.9
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS

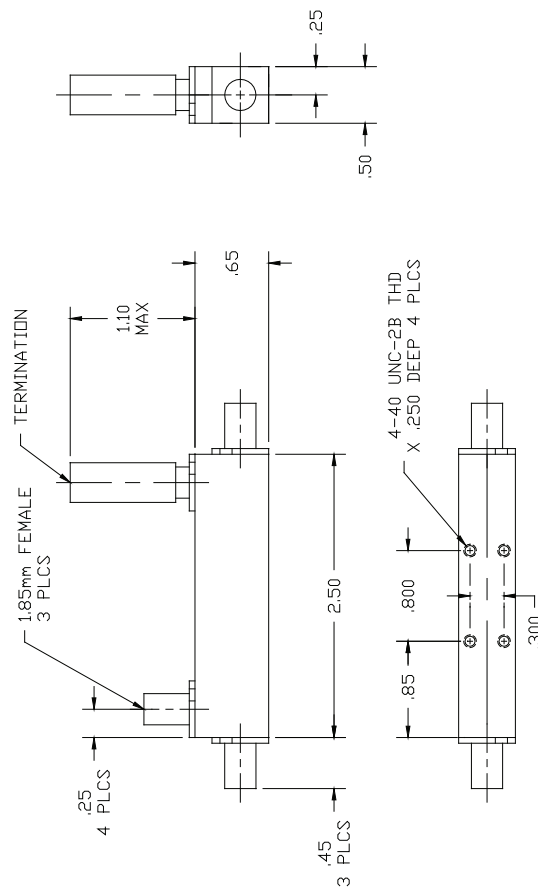

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
 Toll Free 1 (877) 734-5999 • www.krytar.com