




MODEL 101065030
1-65 GHz DIRECTIONAL COUPLER



SPECIFICATIONS

FREQUENCY RANGE	1-65 GHz
COUPLING (with respect to output)	
Nominal	30 ±3.0 dB
Frequency Sensitivity	± 1.25 dB, 1-30 GHz ± 3.20 dB, 30-65 GHz
DIRECTIVITY	> 10 dB
MAXIMUM VSWR (any port)	1.7
INSERTION LOSS	< 2.5 dB
(includes coupled power)	
POWER RATING (input)	
Average	20W
Peak	3 KW
STANDARD CONNECTORS	1.85 mm Female
WEIGHT (ounces)	1.9
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS (INCHES)

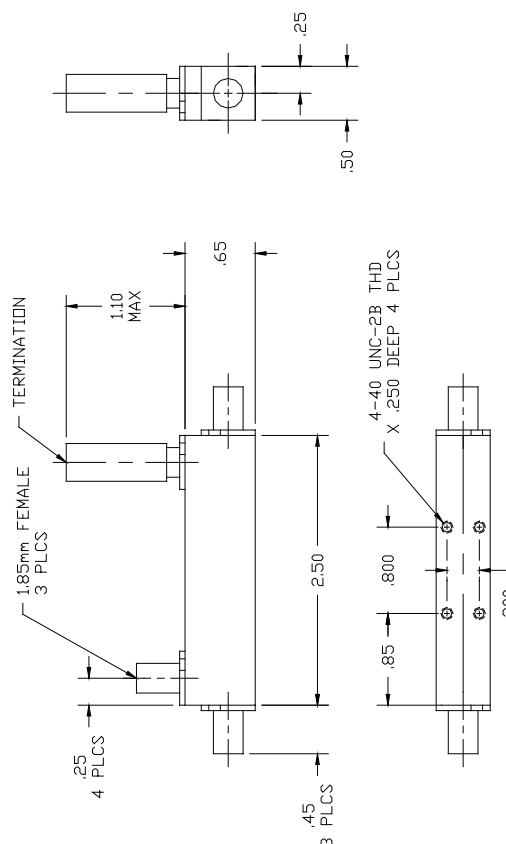

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
 Toll Free 1 (877) 734-5999 • www.krytar.com