





MODEL 106040006
6 - 40 GHz DIRECTIONAL COUPLER

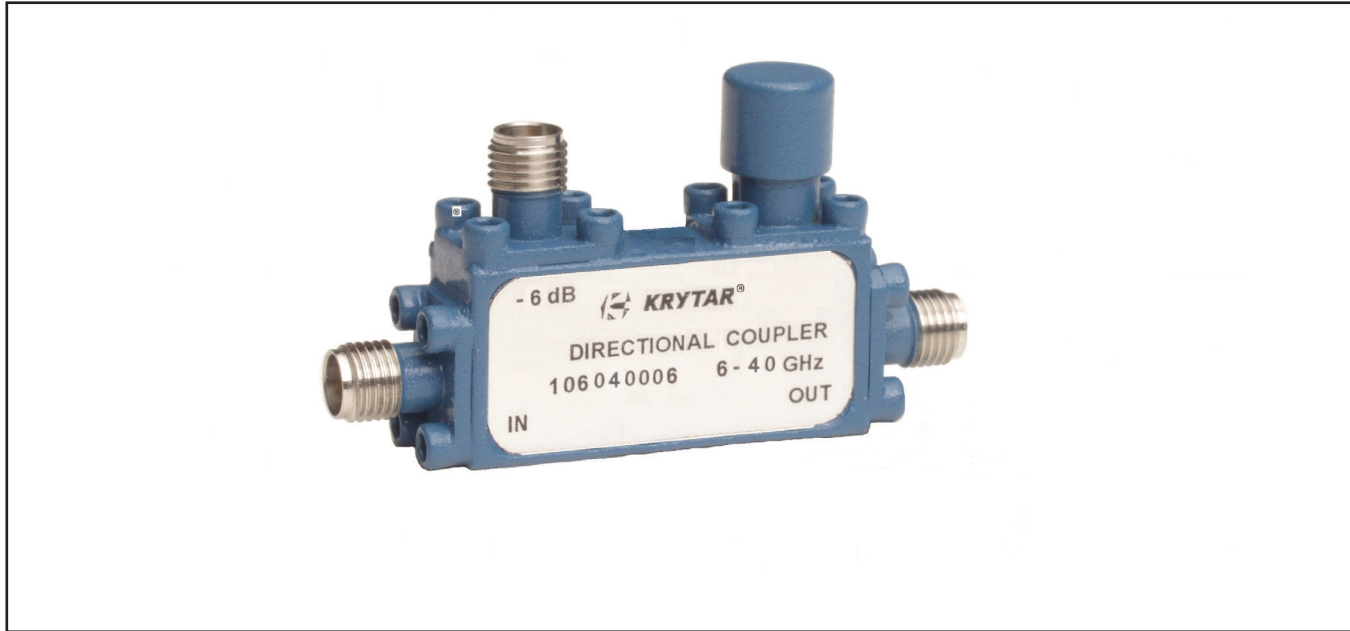

SPECIFICATIONS

DIMENSIONS (INCHES)

FREQUENCY RANGE	6.0-40.0 GHz
COUPLING (with respect to output)	
Nominal	6 ± 1.5 dB
Frequency Sensitivity	± 0.8 dB
DIRECTIVITY	>10 dB
MAXIMUM VSWR (any port)	1.6
INSERTION LOSS dB(includes coupled power)	< 2.2 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	2.4mm Female
WEIGHT (ounces)	1.2
OPERATING TEMPERATURE	-54° to +85° C

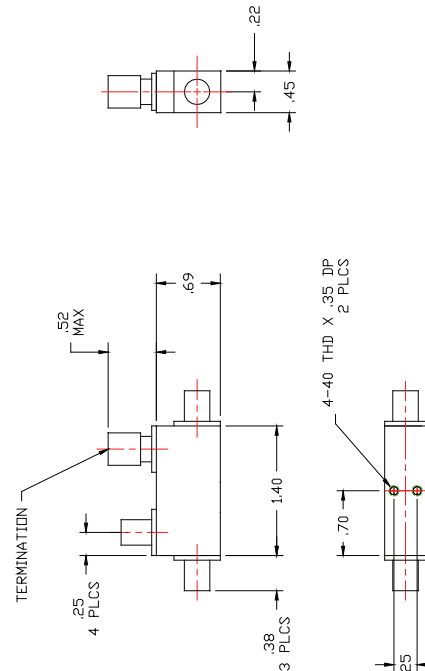

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
 Toll Free 1 (877) 734-5999 • www.krytar.com