




MODEL 501065013
1-65 GHz DUAL-DIRECTIONAL COUPLER



SPECIFICATIONS

FREQUENCY RANGE	1-65 GHz
COUPLING (with respect to input)	
Nominal	13 ± 2.0 dB
Frequency Sensitivity	± 1.5 dB, 1-50 GHz ± 2.5 dB, 1-65 GHz
DIRECTIVITY	> 10 dB, 1-50 GHz > 7 dB, 50-65 GHz
MAXIMUM VSWR (any port)	1.8
INSERTION LOSS (includes coupled power)	< 6.5 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	1.85 mm Female
WEIGHT (ounces)	3.9
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS (INCHES)

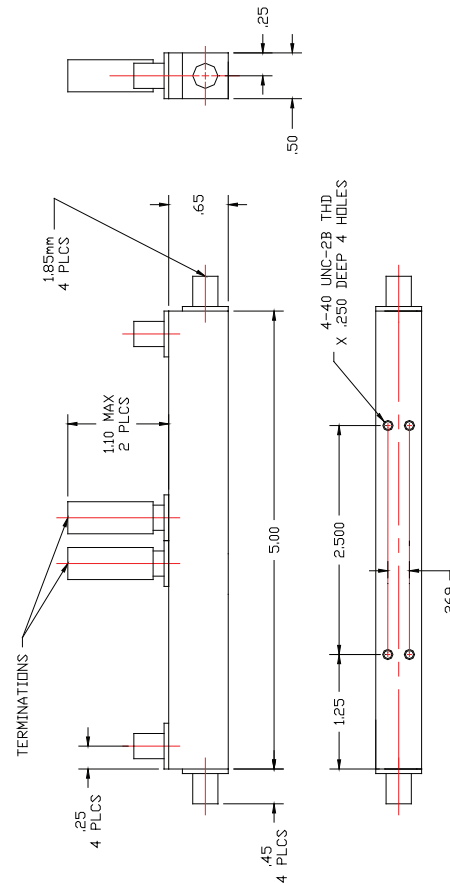

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
 Toll Free 1 (877) 734-5999 • www.krytar.com