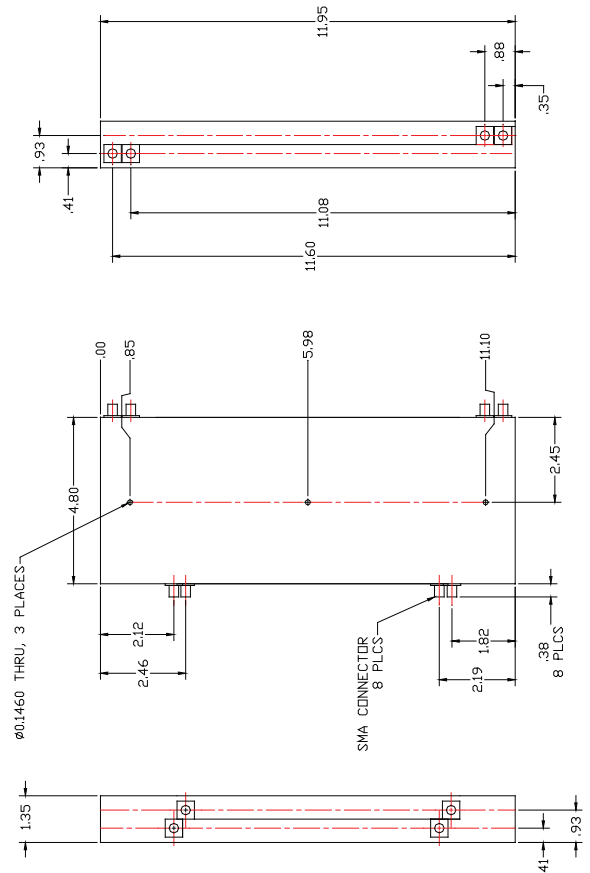

SPECIFICATIONS

FREQUENCY RANGE	0.7-2.2 GHz
PHASE IMBALANCE (Maximum)	± 3 Degrees
AMPLITUDE IMBALANCE (Maximum)	± 0.4 dB
INSERTION LOSS	< 8 dB
MAXIMUM VSWR (any port)	1.2:1 dB
ISOLATION (Minimum)	16 dB
CONNECTOR (Standard)	SMA Female

DIMENSIONS (INCHES)


PHASE TABLE				
OUTPUT	INPUT			
	A1	A2	A3	A4
B1	0°	90°	0°	90°
B2	90°	0°	90°	0°
B3	180°	-90°	0°	90°
B4	-90°	180°	90°	0°