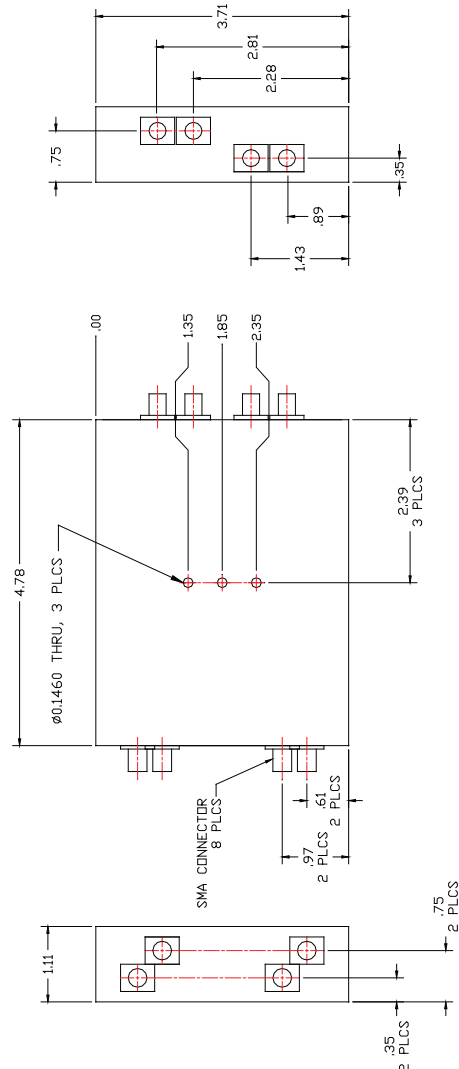



**SPECIFICATIONS**
**DIMENSIONS (INCHES)**

<b>FREQUENCY RANGE</b>	6-26.5 GHz
<b>PHASE IMBALANCE (Maximum)</b>	± 16 Degrees
<b>AMPLITUDE IMBALANCE (Maximum)</b>	± 1.6 dB
<b>INSERTION LOSS</b>	< 13.5 dB
<b>MAXIMUM VSWR (any port)</b>	2:1 dB
<b>ISOLATION (Minimum)</b>	10 dB
<b>CONNECTOR (Standard)</b>	SMA Female


**PHASE TABLE**

OUTPUT	INPUT			
	A1	A2	A3	A4
B1	0°	90°	0°	90°
B2	90°	0°	90°	0°
B3	180°	-90°	0°	90°
B4	-90°	180°	90°	0°