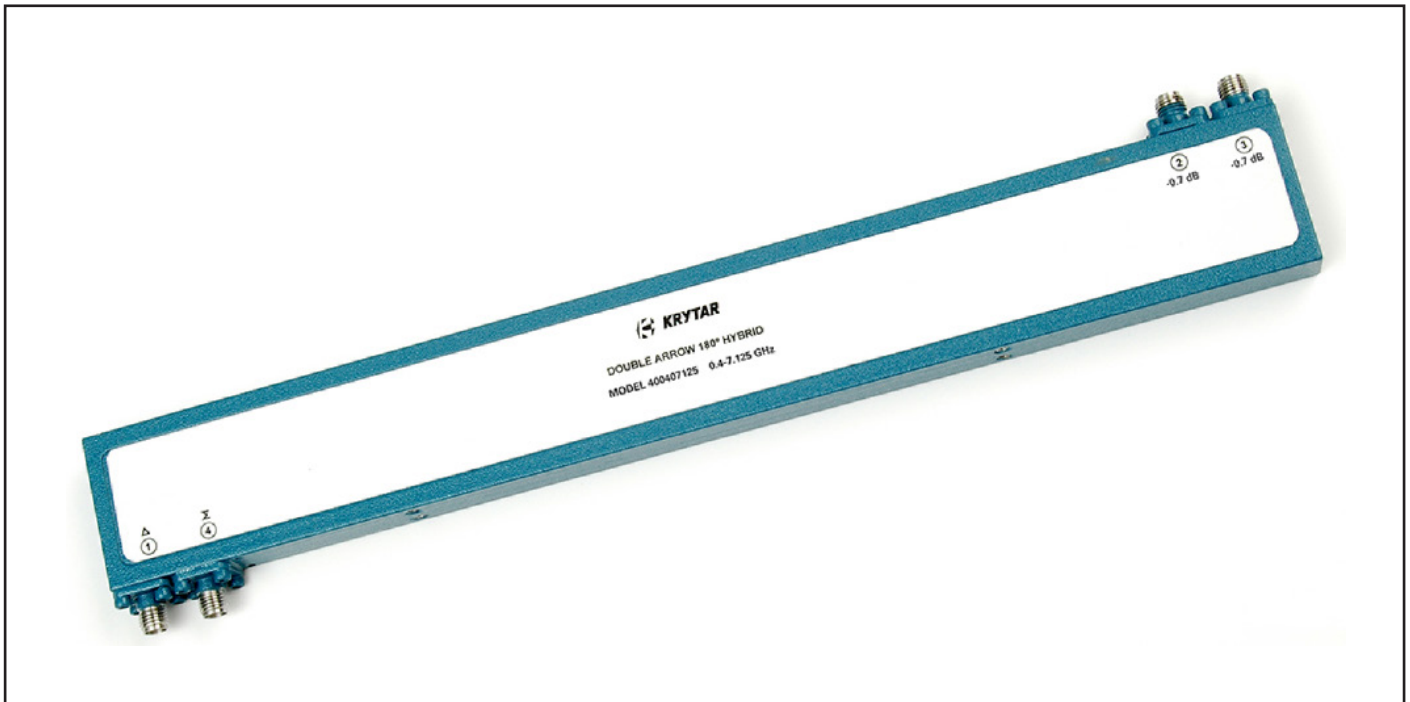



0.4-7.125 GHz 180° HYBRID COUPLER

SPECIFICATIONS

FREQUENCY RANGE	0.4-7.125 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.7 dB
PHASE IMBALANCE	± 10 Degrees
ISOLATION	> 15 dB
MAXIMUM VSWR	1.4
INSERTION LOSS	< 2.9 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	11.0
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS (INCHES)
