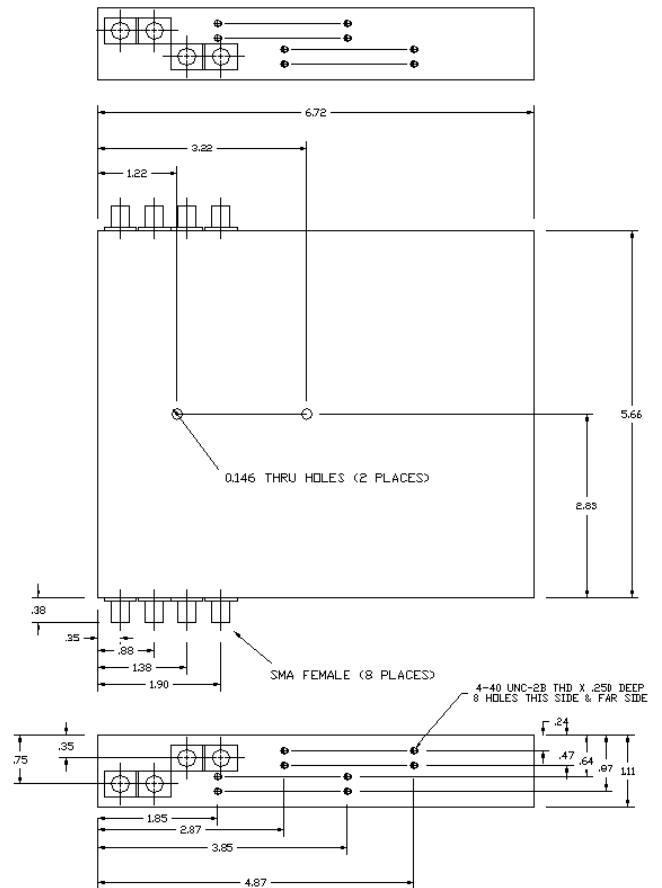



ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE	1-18 GHz
AMPLITUDE IMBALANCE	± 1.0 dB
PHASE IMBALANCE	± 32 Degrees
ISOLATION	> 22 dB
MAXIMUM VSWR	1.9
INSERTION LOSS	< 12.7dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS IN INCHES

INPUT
OUTPUT
