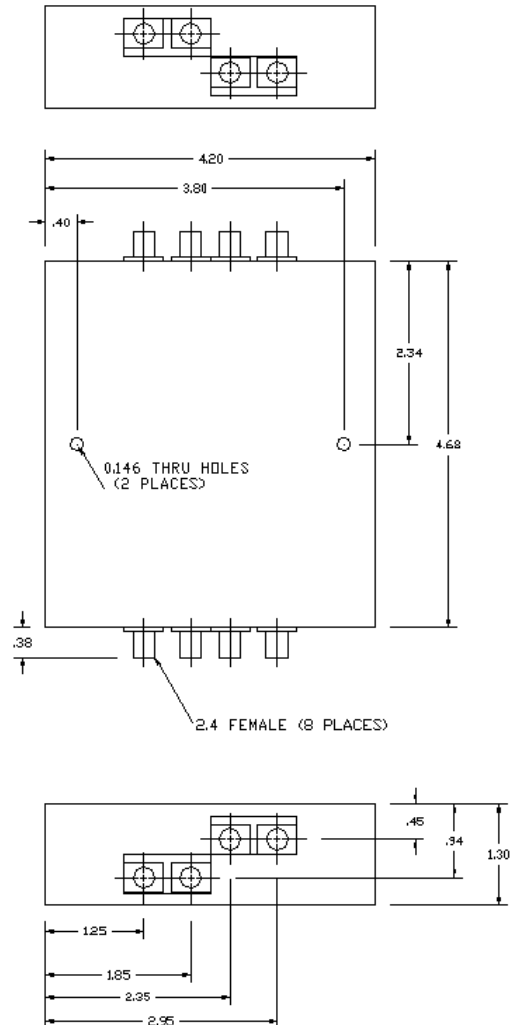



ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE	10-40 GHz
AMPLITUDE IMBALANCE	± 2.0 dB
PHASE IMBALANCE	± 26 Degrees
ISOLATION	> 17 dB
MAXIMUM VSWR	2.2
INSERTION LOSS	<12.3 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	2.4 Female
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS IN INCHES

INPUT
OUTPUT
