


10-67 GHz DIRECTIONAL COUPLER

SPECIFICATIONS
DIMENSIONS IN INCHES

FREQUENCY RANGE	10-67 GHz
COUPLING (with respect to output)	
Nominal	20 ±1.5 dB
Frequency Sensitivity	± 1.5 dB
DIRECTIVITY	> 7.25 dB
MAXIMUM VSWR (any port)	1.9
INSERTION LOSS (includes coupled power)	< 1.7 dB
POWER RATING (input)	
Average	20W
Peak	3 KW
STANDARD CONNECTORS	1.85 mm Female
WEIGHT (ounces)	1.3
OPERATING TEMPERATURE	-54° to +85° C

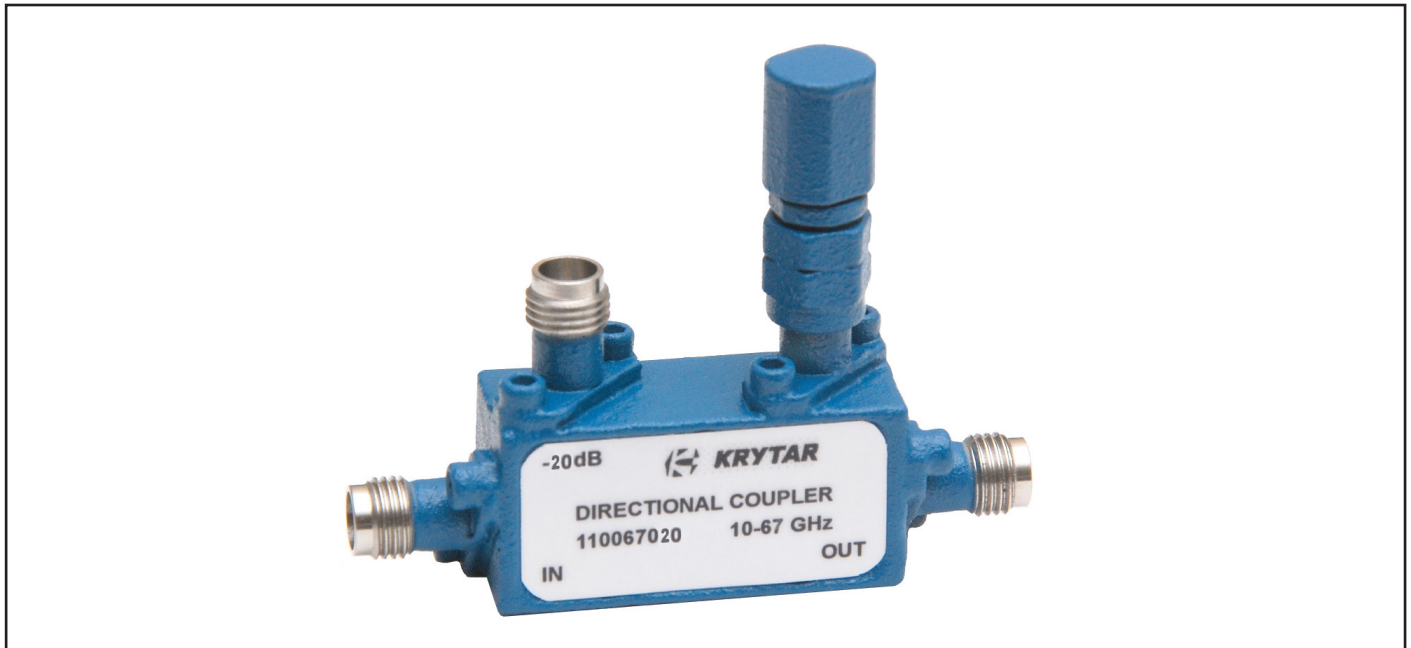