


SPECIFICATIONS

DIMENSIONS

FREQUENCY RANGE	1-40 GHz
MAXIMUM VSWR	1.8
INSERTION LOSS	< 6.5 dB
ISOLATION	> 11 dB
MAXIMUM AMPLITUDE TRACKING	± 1.5 dB
MAXIMUM PHASE TRACKING	± 22°
WEIGHT (ounces)	7.3
OPERATING TEMPERATURE	-54° to +85° C
STANDARD CONNECTORS	2.92 mm Female

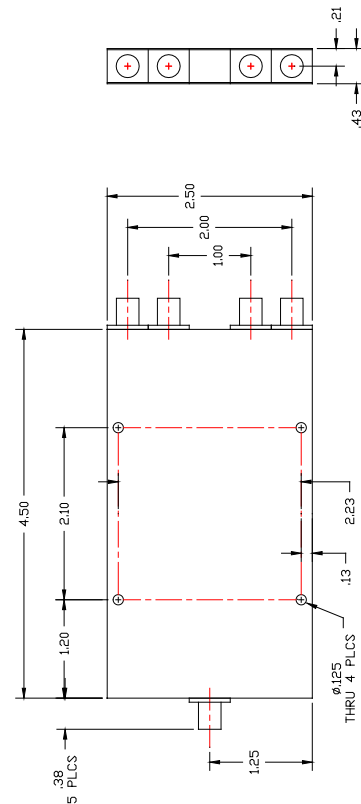

Amplitude and Phase Tracking are the ratio of one output to the other in dB or degrees respectively.
 Input Power Rating is 10 watts with 2:1 load VSWR's.