




**MODEL ULTRA4005070
DOUBLE ARROW**


0.5-7.0 GHz 180° HYBRID COUPLER

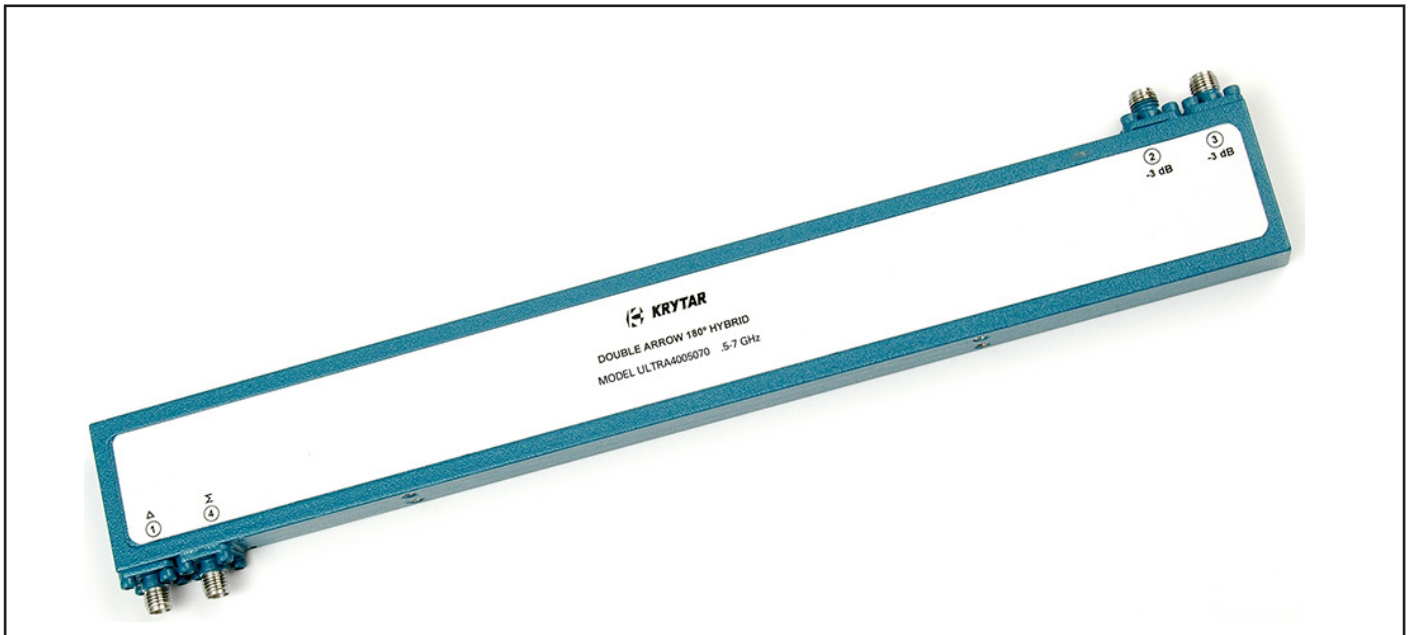

SPECIFICATIONS

FREQUENCY RANGE	0.5-7.0 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.6 dB
PHASE IMBALANCE	± 10 Degrees
ISOLATION	> 18 dB
MAXIMUM VSWR	1.3
INSERTION LOSS	< 2.7 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	11.0
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS (INCHES)

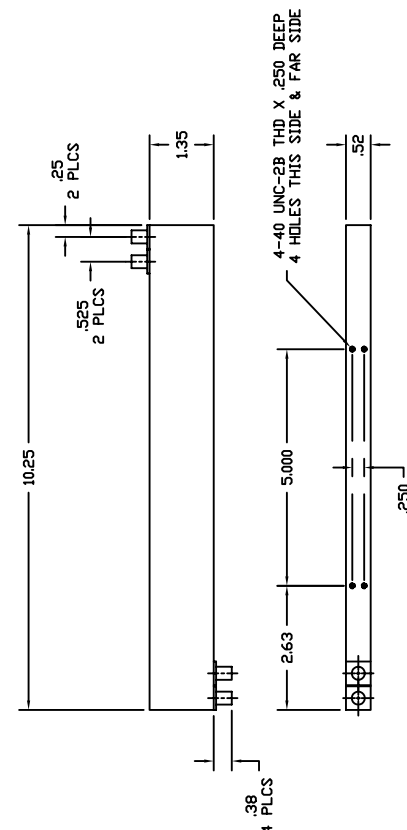

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com