




MODEL ULTRA4040124
DOUBLE ARROW


4.0-12.4 GHz 180° HYBRID COUPLER

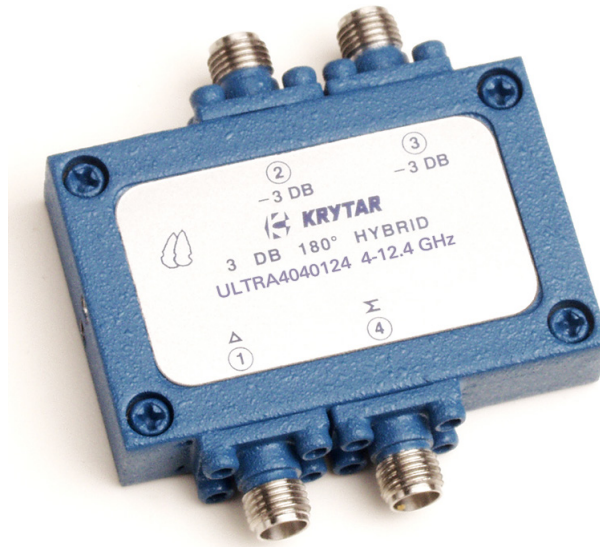

SPECIFICATIONS

FREQUENCY RANGE	4.0-12.4 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.3 dB
PHASE IMBALANCE	± 4 Degrees
ISOLATION	> 19 dB
MAXIMUM VSWR	1.4
INSERTION LOSS	< 0.6 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	1.8
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS (INCHES)

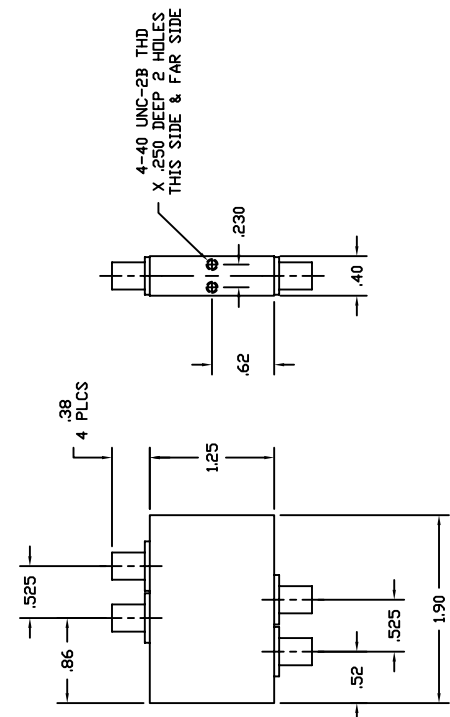

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com