




DIMENSIONS (INCHES)

FREQUENCY RANGE	10-40 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.9 dB
PHASE IMBALANCE	± 8 Degrees
ISOLATION	> 15 dB
MAXIMUM VSWR	1.65
INSERTION LOSS	< 1.5 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	
4100400	2.4 mm Female
4100400K	2.92 mm Female
WEIGHT (ounces)	1.2
OPERATING TEMPERATURE	-54° to +85° C

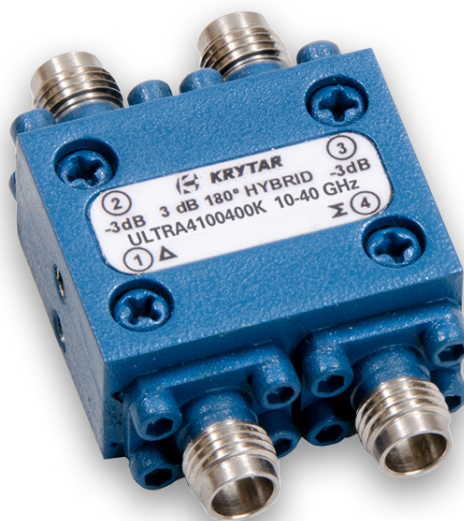