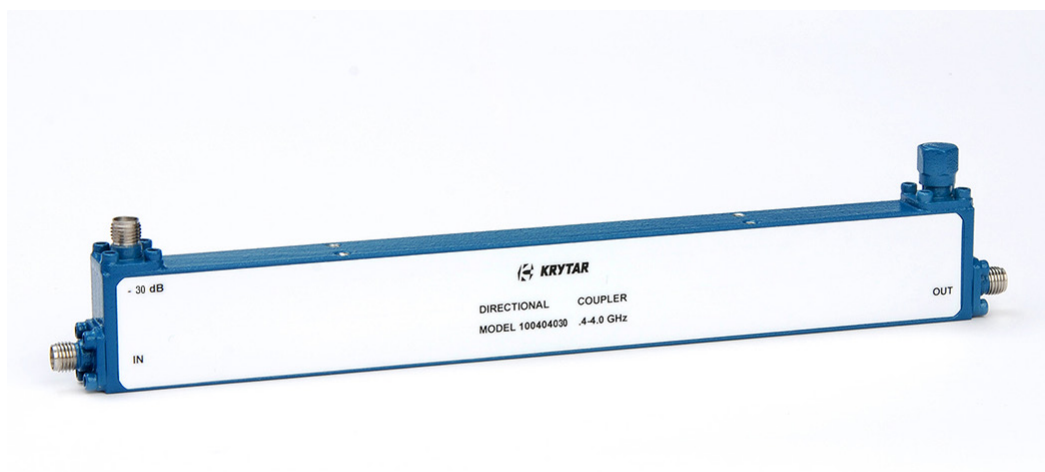


0.4-4.0 GHz DIRECTIONAL COUPLER

SPECIFICATIONS

FREQUENCY RANGE	0.4-4.0 GHz
COUPLING (with respect to output)	
Nominal	30 ± 1.0 dB
Frequency Sensitivity	± 1.0 dB
DIRECTIVITY	> 15 dB
MAXIMUM VSWR (any port)	1.2
INSERTION LOSS (includes coupled power)	< 0.7 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	5.9
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS (INCHES)
