MODEL ULTRA6010400
MLDD 2-WAY POWER DIVIDER
1-40 GHz

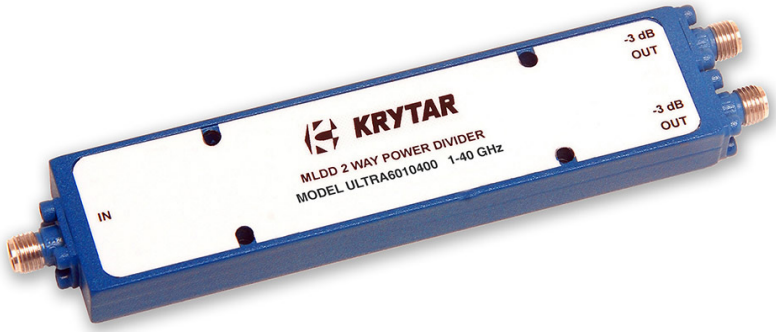

SPECIFICATIONS

FREQUENCY RANGE	1-40 GHz
MAXIMUM INPUT VSWR	1.5, 1-20 GHz 1.65, 20-40 GHz
MAXIMUM OUTPUT VSWR	1.70, 1-20 GHz 1.85, 20-40 GHz
INSERTION LOSS	< 2.5 dB
ISOLATION	> 14 dB
MAXIMUM AMPLITUDE TRACKING	± 0.25 dB
MAXIMUM PHASE TRACKING	± 5º, 1-20 GHz ± 10º, 20-40 GHz
WEIGHT (ounces)	3.0
STANDARD CONNECTORS 6010400	2.4 mm Female

Amplitude and phase tracking are the ratio of one output to the other in dB or degrees respectively.
Input power rating is 10 watts with 2:1 load VSWR's.

DIMENSIONS

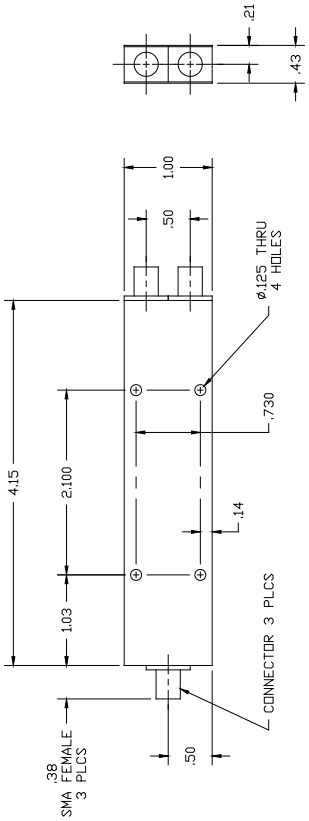

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com