



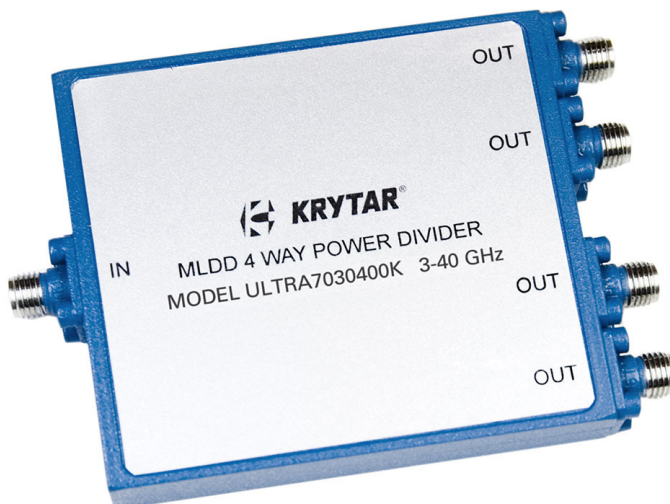

SPECIFICATIONS

FREQUENCY RANGE	3-40 GHz
MAXIMUM VSWR	
INPUT	1.9, 3-32 GHz 2.5, 32-40 GHz
OUTPUT	1.7, 3-32 GHz 2.0, 32-40 GHz
INSERTION LOSS	< 3.4 dB
ISOLATION	> 13 dB
MAXIMUM AMPLITUDE TRACKING	± 0.35 dB
MAXIMUM PHASE TRACKING	± 10°
WEIGHT (ounces)	4.1
STANDARD CONNECTORS	2.92 mm Female

DIMENSIONS (INCHES)

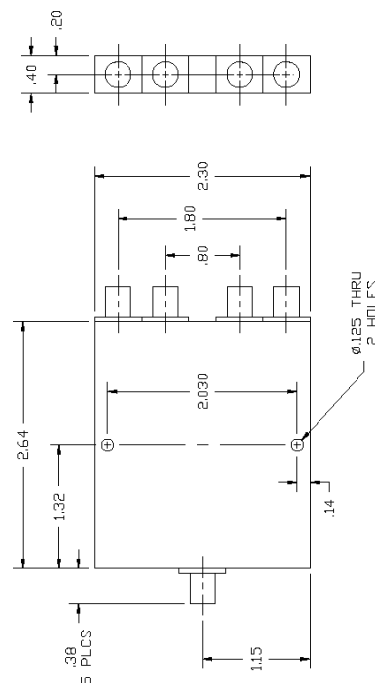

Amplitude and Phase Tracking are the ratio of one output to the other in dB or degrees respectively.
 Input Power Rating is 10 watts with 2:1 load VSWR's.