




MODELS 102020006

2-20 GHz DIRECTIONAL COUPLERS

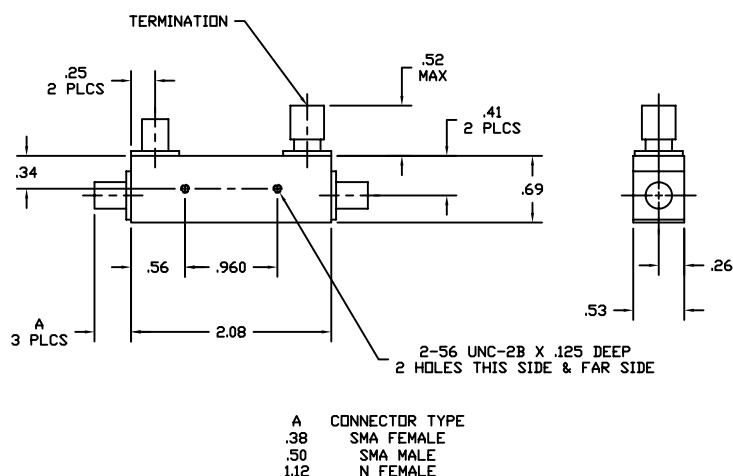

DIMENSIONS IN INCHES

SPECIFICATIONS

(REV 1)

FREQUENCY RANGE	2-20 GHz
COUPLING (with respect to output)	
Nominal	06 ± 1.0 dB
Frequency Sensitivity	± 0.40 dB
DIRECTIVITY	> 15 dB
MAXIMUM VSWR (mainline)	1.4
(secondary line)	1.50
INSERTION LOSS (includes coupled power)	< 1.9 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	1.7
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C



1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com

9-12-2023