
MODELS 102020006

2-20 GHz DIRECTIONAL COUPLERS

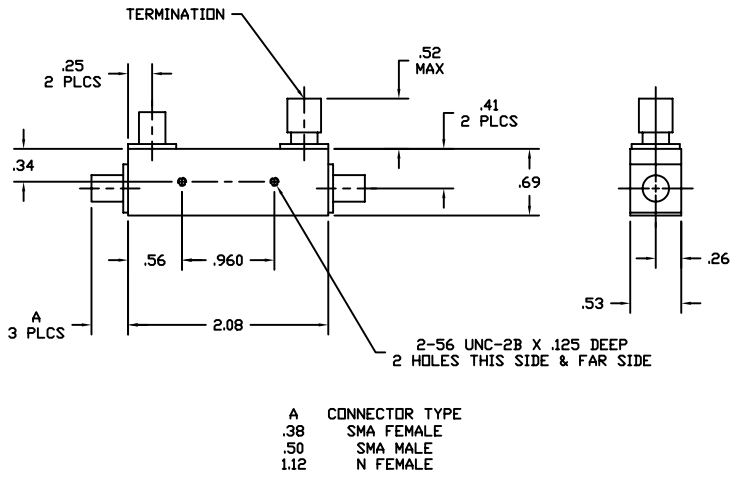

A	CONNECTOR TYPE
.38	SMA FEMALE
.50	SMA MALE
1.12	N FEMALE

DIMENSIONS IN INCHES

SPECIFICATIONS (REV 1)

FREQUENCY RANGE	2-20 GHz
COUPLING (with respect to output)	
Nominal	06 ± 1.0 dB
Frequency Sensitivity	± 0.40 dB
DIRECTIVITY	> 15 dB
MAXIMUM VSWR (mainline)	1.4
(secondary line)	1.45
INSERTION LOSS (includes coupled power)	< 1.9 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	1.7
OPERATING TEMPERATURE	-54º to +85º C

KRYTAR®
1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com

09-12-23